


PIKD 2,5/SV/PE GNYE

Three-storey initiator terminal | Multi-conductor terminal, push-in connection, mounting type: TS 35/7.5, rated cross-section: 2.5 mm², width: 5.1 mm, colour: green-yellow

Item number: 27040.2
Product weight (kg): 0.0212 kg
Packing unit: 50

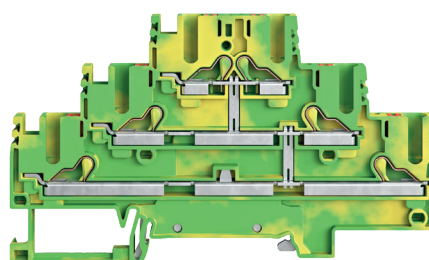

TECHNICAL CHARACTERISTICS

Series:	PRK
Connection type:	Push-in
Rated cross-section (mm ²):	2.5
Rated current (A):	20
Rated voltage (VDC):	500
Number of cables:	2
Cross-section rigid (mm ²):	0.5-4
Flexible conductor cross-section (mm ²):	0.5-2.5
Conductor cross section with ferrule (mm ²):	0.5-2.5
Wire section AWG:	20 - 12
Shell material:	Polyamide 6.6
Colour:	Green-yellow

TECHNICAL CHARACTERISTICS

UL test standard:	UL 1059
UL file number:	E95701
ROHS compliant:	Yes
REACH compliant:	Yes
Manufacturer:	CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS

Length (mm):	102
Width (mm):	5.1
Height TS (mm):	57.7