


PIKD 2,5/L/L/N GR

Three-storey initiator terminal | Multi-conductor terminal, push-in connection, mounting type: TS 35/7.5, rated cross-section: 2.5 mm², width: 5.1 mm, colour: grey

Item number:	27045.6
Product weight (kg):	0.01 kg
Packing unit:	50

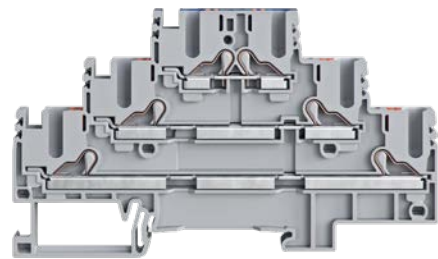

TECHNICAL CHARACTERISTICS

Series:	PRK
Connection type:	Push-in
Rated cross-section (mm²):	2.50
Rated current (A):	20
Rated voltage (VDC):	500
Number of cables:	2
Cross-section rigid (mm²):	0.5-4
Flexible conductor cross-section (mm²):	0.5-2.5
Conductor cross section with ferrule (mm²):	0.5-2.5
Wire section AWG:	20 - 12
Shell material:	Polyamide 6.6

TECHNICAL CHARACTERISTICS

Colour: Grey

UL test standard: UL 1059


UL file number: E95701

ROHS compliant: Yes

REACH compliant: Yes

Manufacturer: CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS



DIMENSIONS

Length (mm): 102.00

Width (mm): 5.1

Height TS (mm): 57.70