

# KDS-Set 8/16 BK

Cable entry set, consisting of: 1 x KDS-SR 8/16, 1 x KDS-Inlay 1, 2 x KDS-Inlay 4

Item number: 28604.4

Packing unit: 1




## TECHNICAL CHARACTERISTICS

|                                |                 |
|--------------------------------|-----------------|
| Material:                      | Polyamide PA6.6 |
| Glass fibre reinforced:        | Yes             |
| Halogen-free:                  | Yes             |
| Silicone-free:                 | Yes             |
| Sealing material:              | Polyurethane    |
| Colour:                        | Black           |
| Mounting type:                 | Screw           |
| Number of screw holes:         | 4               |
| Fastening screw torque (Nm):   | 3               |
| Working temperature min. (°C): | -40             |
| Working temperature max. (°C): | +120            |
| Flammability rating UL 94:     | V0              |
| UL test standard:              | UL 508A         |

## TECHNICAL CHARACTERISTICS

|                            |                                    |
|----------------------------|------------------------------------|
| UL file number:            | E489821                            |
| Protection class EN 60529: | IP66                               |
| ROHS compliant:            | Yes                                |
| REACH compliant:           | Yes                                |
| Manufacturer:              | CONTA-CLIP Verbindungstechnik GmbH |

## DIMENSIONS

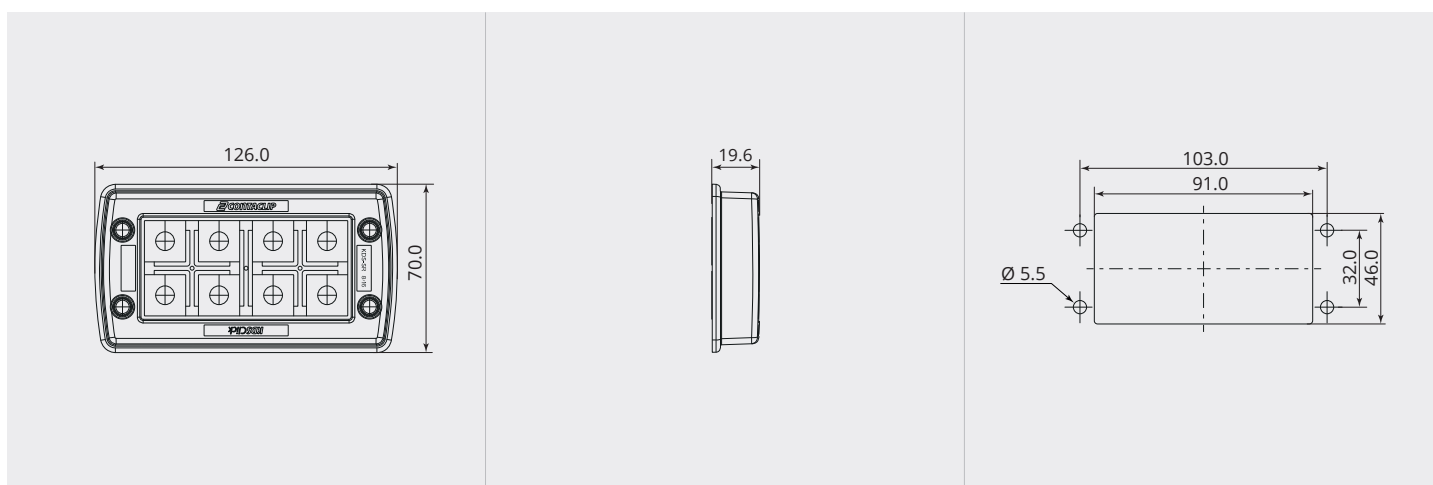

## DIMENSIONS

|                           |      |
|---------------------------|------|
| Width (mm):               | 70   |
| Height (mm):              | 19.6 |
| Construction height (mm): | 19.6 |
| Length (mm):              | 126  |

## DIMENSIONS

|                      |     |
|----------------------|-----|
| Cut-out width (mm):  | 46  |
| Cut-out length (mm): | 91  |
| Screw Ø (mm):        | 5.5 |