

KDS-Set 10/24 BK

Cable entry set, consisting of: 1 x KDS-SR 10/24, 1x KDS-Inlay 2,4,6 each

Item number: 28605.4

Packing unit: 1




TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Glass fibre reinforced:	Yes
Halogen-free:	Yes
Silicone-free:	Yes
Sealing material:	Polyurethane
Colour:	Black
Mounting type:	Screw
Number of screw holes:	4
Fastening screw torque (Nm):	3
Working temperature min. (°C):	-40
Working temperature max. (°C):	+120
Flammability rating UL 94:	V0
UL test standard:	UL 508A

TECHNICAL CHARACTERISTICS

UL file number:	E489821
Protection class EN 60529:	IP66
ROHS compliant:	Yes
REACH compliant:	Yes
Manufacturer:	CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS

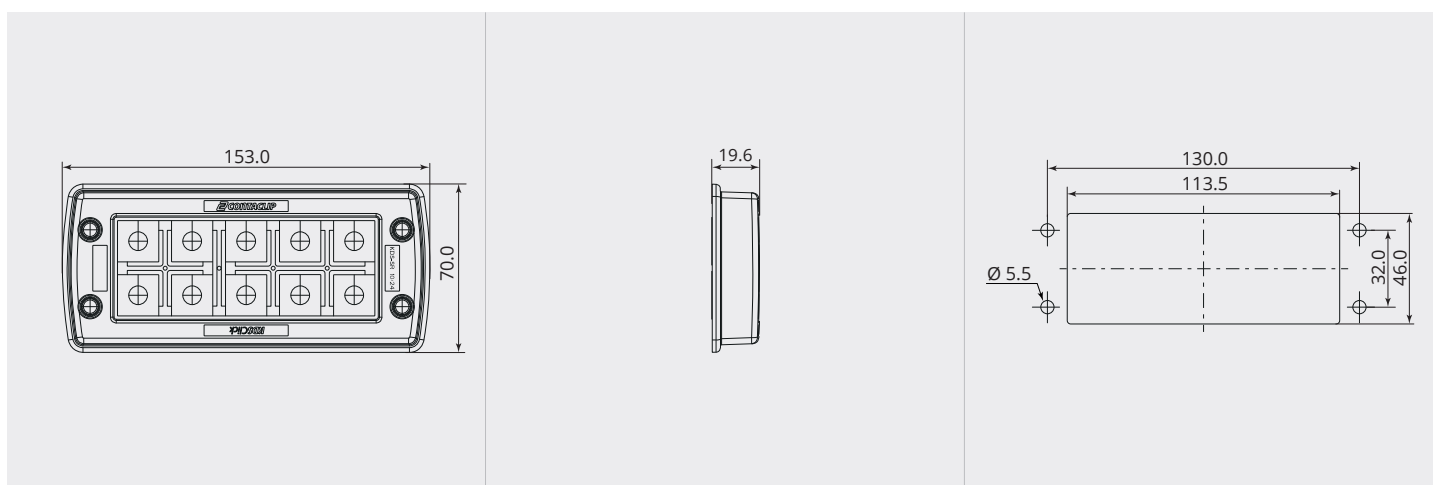

DIMENSIONS

Width (mm):	70
Height (mm):	19.6
Construction height (mm):	19.6
Length (mm):	153

DIMENSIONS

Cut-out width (mm):	46
Cut-out length (mm):	113.5
Screw Ø (mm):	5.5