
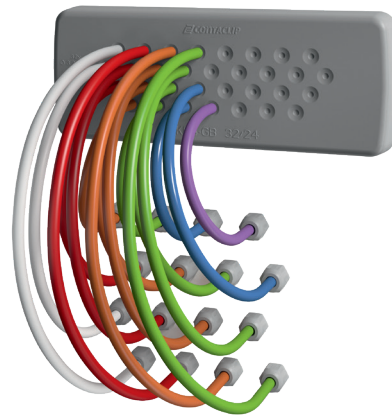


KES-GB 16-1/24 GR

Cable entry with membrane for unassembled cables, Length: 147 mm, Width: 58 mm

Item number: 28643.6

Packing unit: 10




TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Glass fibre reinforced:	Yes
Halogen-free:	Yes
Silicone-free:	Yes

TECHNICAL CHARACTERISTICS

Sealing material:	TPE
Colour:	Grey
Mounting type:	Snap-on and screw-on
Number of screw holes:	4
Fastening screw torque (Nm):	3
Working temperature min. (°C):	-40
Working temperature max. (°C):	+90
Flammability rating UL 94:	V0
UL test standard:	UL 508A
UL file number:	E489821
Protection class EN 60529:	IP66
Number of cables:	16
Number of cables for Ø 12.0 - 16.2 mm:	3
Number of cables for Ø 8.0 - 12.5 mm:	1
Number of cables for Ø 5.5 - 10.5 mm:	1
Number of cables for Ø 4.0 - 7.5 mm:	9
Number of cables for Ø 3.2 - 6.3 mm:	2
ROHS compliant:	Yes
REACH compliant:	Yes
Manufacturer:	CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS

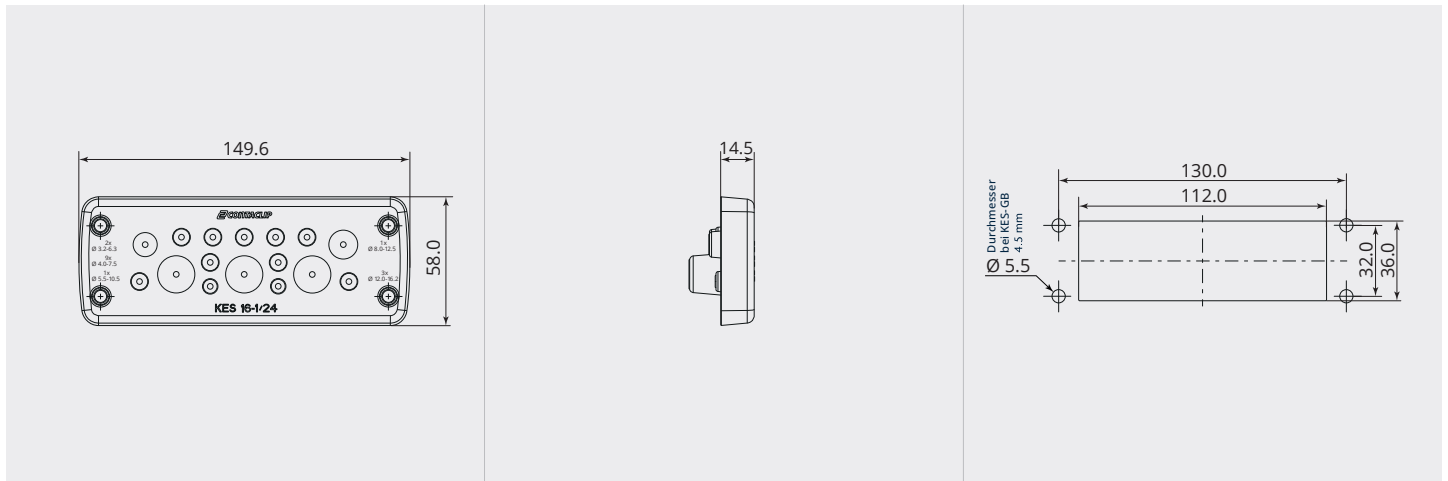

DIMENSIONS

Width (mm):	58
Construction height (mm):	14.5
Length (mm):	149.6
Cut-out width (mm):	36
Cut-out length (mm):	112