

KDS-SR90 10/24 BK

90° Cable feed-throughs with foamed-in seal and tool-free coverlength: 147 mm, width: 79.5 mm

Item number: 28953.4


Packing unit: 516



TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Glass fibre reinforced:	Yes
UV-stabilised:	Yes
Halogen-free:	Yes
Silicone-free:	Yes
Sealing material:	TPE
Colour:	Black
Mounting type:	Screw
Number of screw holes:	4
Fastening screw torque (Nm):	3
Working temperature min. (°C):	-40
Working temperature max. (°C):	+120
Flammability rating UL 94:	V0
UL test standard:	UL 508A
Protection class EN 60529:	IP66
ROHS compliant:	Yes
REACH compliant:	Yes
Manufacturer:	CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS

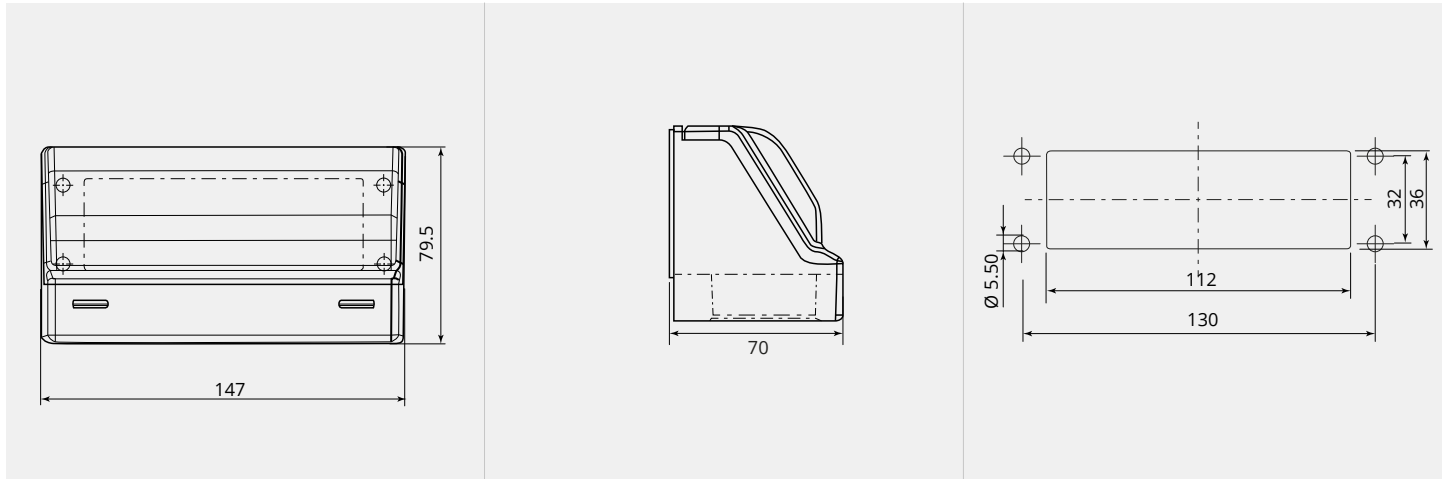

DIMENSIONS

Width (mm):	79.50
Height (mm):	70
Construction height (mm):	70
Length (mm):	147.00
Cut-out width (mm):	36.00
Cut-out length (mm):	112.00
Screw $\varnothing$ (mm):	5.5