

KDS-SR-FB1/B BK

Compact cable gland with foamed-in seallength: 73 mm, width: 39 mm

Item number: 29008.4


Packing unit: 10



TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Glass fibre reinforced:	Yes
Halogen-free:	Yes
Silicone-free:	Yes
Sealing material:	TPE
Colour:	Black
Mounting type:	Screw
Number of screw holes:	2
Fastening screw torque (Nm):	3
Working temperature min. (°C):	-40
Working temperature max. (°C):	+120
Flammability rating UL 94:	V0
UL test standard:	UL 508A
Protection class EN 60529:	IP66
ROHS compliant:	Yes
REACH compliant:	Yes
Manufacturer:	CONTA-CLIP Verbindungstechnik GmbH

DIMENSIONS

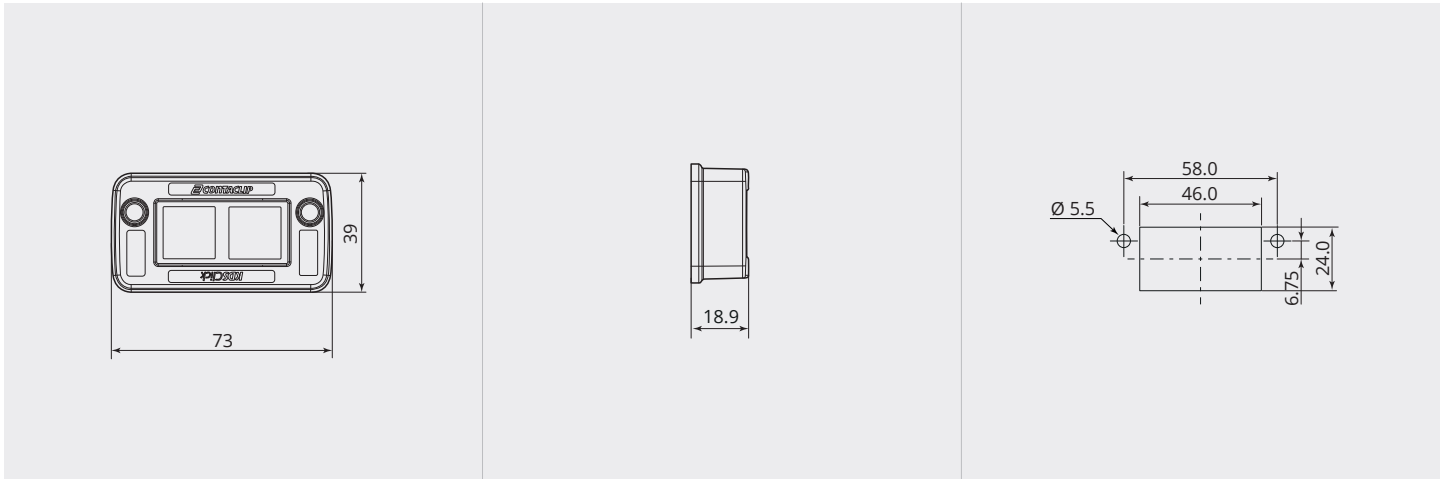

DIMENSIONS

Width (mm):	39.00
Height (mm):	19
Construction height (mm):	18.9
Length (mm):	73.00
Cut-out width (mm):	24.00
Cut-out length (mm):	46.00
Screw \varnothing (mm):	5.5