

KDSI-SR-G 10/24 BK

Split Cable feed-throughs with TPE seal,length: 153mm, width: 64mm

Item number: 29103.4


Packing unit: 1



TECHNICAL CHARACTERISTICS

| | |
|---------------------------------------|------------------------------------|
| Material: | Polyamide PA6.6 |
| Glass fibre reinforced: | Yes |
| UV-stabilised: | Yes |
| Halogen-free: | Yes |
| Silicone-free: | Yes |
| Sealing material: | TPE |
| Colour: | Black |
| Mounting type: | Screw |
| Number of screw holes: | 4 |
| Fastening screw torque (Nm): | 3 |
| Working temperature min. (°C): | -40 |
| Working temperature max. (°C): | +120 |
| Flammability rating UL 94: | V0 |
| UL test standard: | UL 508A |
| Protection class EN 60529: | IP66 |
| ROHS compliant: | Yes |
| REACH compliant: | Yes |
| Manufacturer: | CONTA-CLIP Verbindungstechnik GmbH |

DIMENSIONS

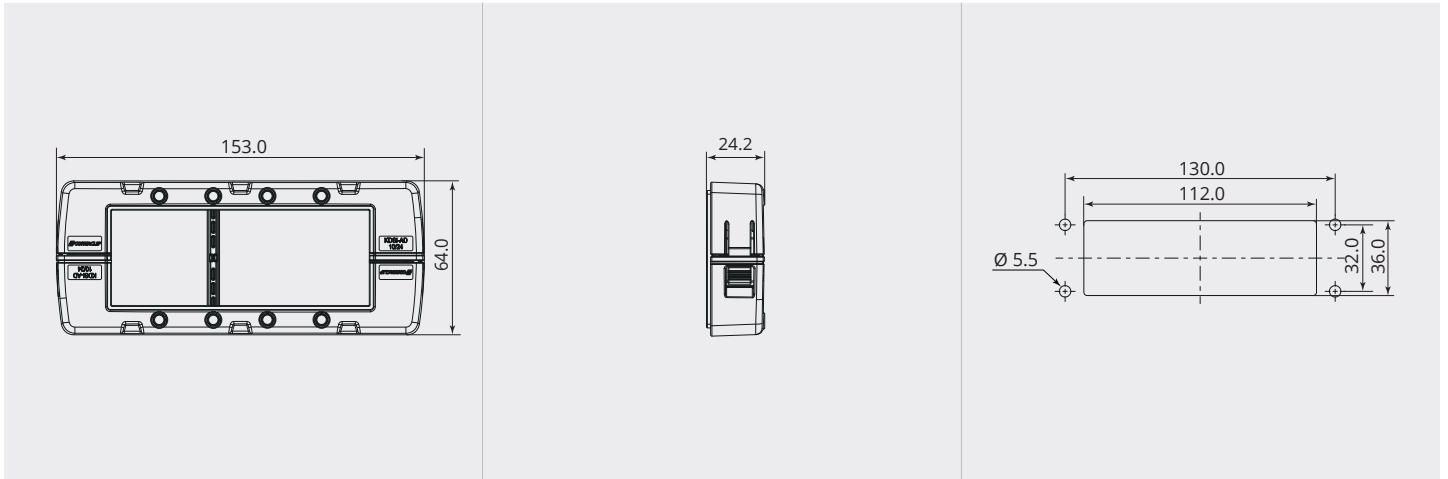

DIMENSIONS

| | |
|---------------------------|--------|
| Width (mm): | 64.00 |
| Height (mm): | 24.2 |
| Construction height (mm): | 24.2 |
| Length (mm): | 153.00 |
| Cut-out width (mm): | 36.00 |
| Cut-out length (mm): | 112.00 |
| Screw \varnothing (mm): | 5.5 |