

# Copper tube crimping lug, long version, 70mm<sup>2</sup>


Type 2A-M, for copper conductors

|                                                      |                                                                                     |
|------------------------------------------------------|-------------------------------------------------------------------------------------|
| <p>Item number: 2A14-M16</p> <p>Packing unit: 50</p> |  |
| <p>CE</p> <p>UL E125401</p> <p>RoHS</p>              |                                                                                     |

## TECHNICAL CHARACTERISTICS

|                                |                        |
|--------------------------------|------------------------|
| Material:                      | ETP copper (CW008A)    |
| Surface:                       | Eletrolytically tinned |
| Wire section (mm²):            | 70                     |
| Wire section thin wires (mm²): | 50 - 70                |
| Wire section (AWG/MCM):        | 0 - 00                 |
| Bolt (Ø):                      | 16                     |
| Inspection hole:               | No                     |
| Manufacturer:                  | Cembre S.p.A.          |

## DIMENSIONS

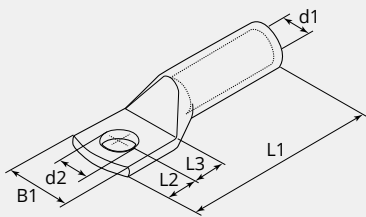

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 83.0 |
| L2 (mm): | 16.0 |
| L3 (mm): | 18.0 |
| B1 (mm): | 26.0 |
| d1 (Ø):  | 11.3 |
| d2 (Ø):  | 17.0 |

## Note

Each connector is marked as follows: Company logo and product description, conductor cross-section (mm<sup>2</sup>) and pin Ø (mm)