

# Nylon-insulated ring cable lug CU, 1.5-2.5mm²

Type AN-M, short-circuit proof for copper conductors

Item number: AN06-M3.5


Packing unit: 100



## TECHNICAL CHARACTERISTICS

|                            |                        |
|----------------------------|------------------------|
| Material:                  | ETP copper (CW008A)    |
| Surface:                   | Eletrolytically tinned |
| Wire section (mm2):        | 1.5 - 2.5              |
| Bolt (Ø):                  | 3.5                    |
| Inspection hole:           | Yes                    |
| Colour:                    | Blue                   |
| Flammability rating UL 94: | UL94 - V2              |
| Operating temperature:     | -20°C - +115°C         |
| Max. temperature:          | +130°C                 |
| Manufacturer:              | Cembre S.p.A.          |

## DIMENSIONS

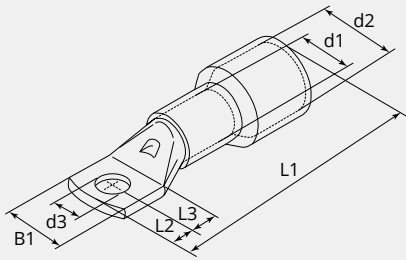

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 22.8 |
| L2 (mm): | 3.5  |
| L3 (mm): | 4.5  |
| B1 (mm): | 6.5  |
| d1 (Ø):  | 2.4  |
| d2 (Ø):  | 4.1  |
| d3 (Ø):  | 3.7  |

## Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)