

Nylon-insulated ring cable lug CU, 1.5-2.5mm²


Type AN-M, short-circuit proof for copper conductors

Item number:	AN06-M5
Packing unit:	100
  	
	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	1.5 - 2.5
Bolt (Ø):	5
Inspection hole:	Yes
Colour:	Blue
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

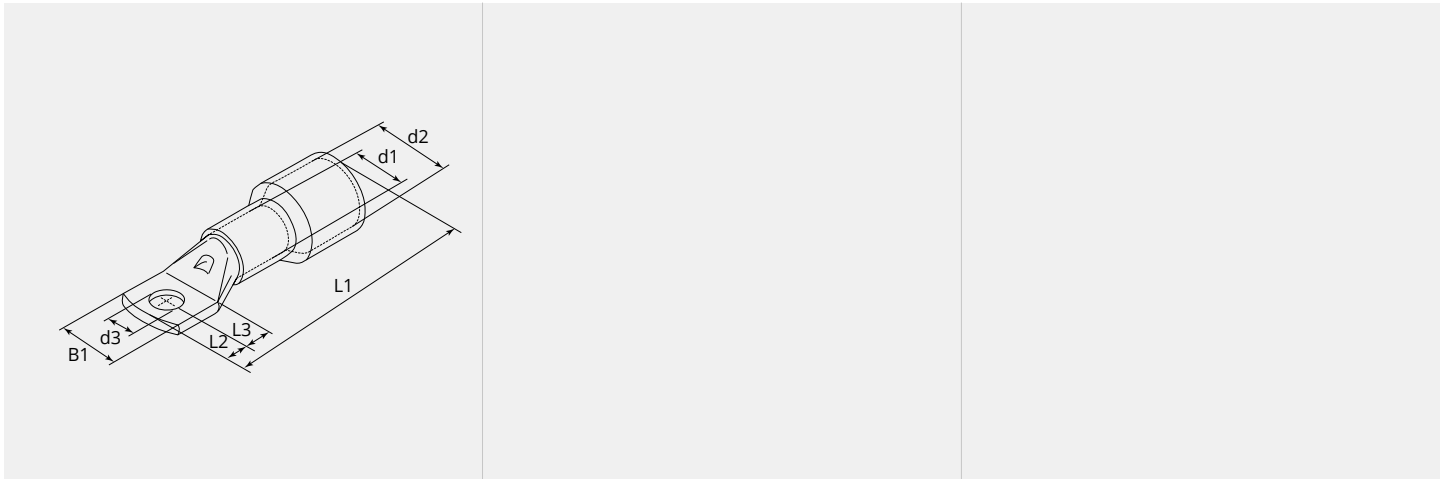

DIMENSIONS

L1 (mm):	24.8
L2 (mm):	4.5
L3 (mm):	5.5
B1 (mm):	8.5
d1 (Ø):	2.4
d2 (Ø):	4.1
d3 (Ø):	5.3

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)