

Nylon-insulated ring cable lug CU, 1.5-2.5mm²


Type AN-M, short-circuit proof for copper conductors

Item number:	AN06-M6	
Packing unit:	100	
 		

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	1.5 - 2.5
Bolt (Ø):	6
Inspection hole:	Yes
Colour:	blue
Colour:	\\CHZH-PMA1565\ms3_IMAM\be32893f-77e5-4e4d-82ef-810529cc027f\A0000012623f161312.ai
Flammability rating UL 94:	UL94 - V2
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS

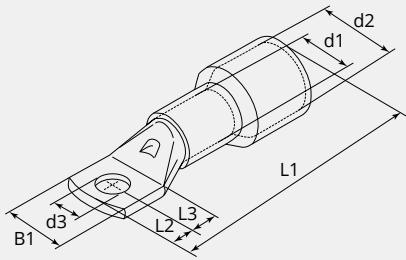

DIMENSIONS

L1 (mm):	25.8
L2 (mm):	5.0
L3 (mm):	6.0
B1 (mm):	9.0
d1 (Ø):	2.4
d2 (Ø):	4.1
d3 (Ø):	6.4

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)