


Nylon-insulated ring cable lug CU, 4-6mm²

Type AN-M, short-circuit proof for copper conductors


Item number:	AN1-M3.5
Product weight (kg):	0.00 kg
Packing unit:	100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	4 - 6
Bolt (Ø):	3.50
Inspection hole:	Yes
Colour:	Yellow
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

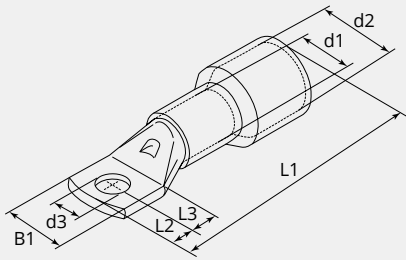

DIMENSIONS

L1 (mm):	27.0
L2 (mm):	3.5
L3 (mm):	4.5
B1 (mm):	7.5
d1 (Ø):	3.6
d2 (Ø):	5.3
d3 (Ø):	3.7

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)