

Nylon-insulated ring cable lug CU, 50mm²


Type AN-M, short-circuit proof for copper conductors

Item number:	AN10-M14
Packing unit:	50
  	
	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	50
Wire section thin wires (mm ²):	35 - 50
Bolt (Ø):	14
Inspection hole:	Yes
Colour:	White
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

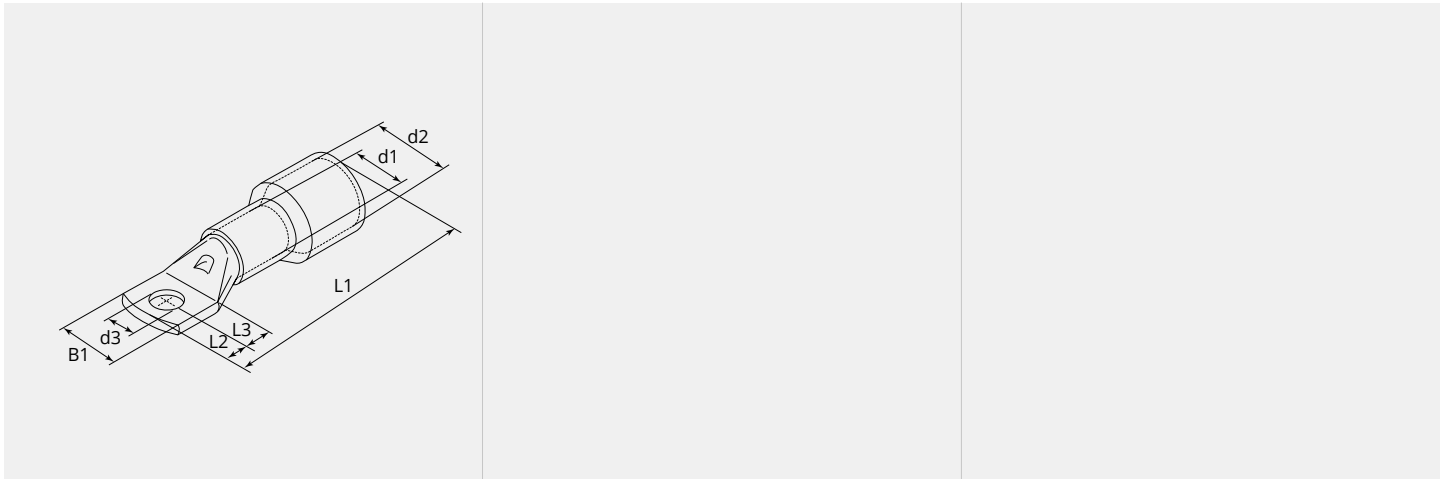

DIMENSIONS

L1 (mm):	70.0
L2 (mm):	14.0
L3 (mm):	16.0
B1 (mm):	25.0
d1 (Ø):	10.0
d2 (Ø):	13.8
d3 (Ø):	15.0

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)