

Nylon-insulated ring cable lug CU, 70mm²


Type AN-M, short-circuit proof for copper conductors

Item number: AN14-M16 Product weight (kg): 0.00 kg Packing unit: 50	
CE PA6.6 RoHS	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	70
Wire section thin wires (mm ²):	50 - 70
Bolt (Ø):	16.00
Inspection hole:	Yes
Colour:	Blue
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

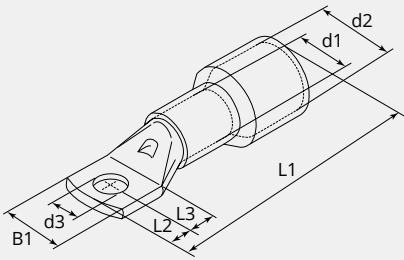

DIMENSIONS

L1 (mm):	80.0
L2 (mm):	16.0
L3 (mm):	18.0
B1 (mm):	26.0
d1 (Ø):	11.3
d2 (Ø):	15.8
d3 (Ø):	17.0

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)