


Nylon-insulated ring cable lug CU, 95mm²

Type AN-M, short-circuit proof for copper conductors

Item number: AN19-M8


Packing unit: 25



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	95
Wire section thin wires (mm ²):	70 - 95
Bolt (Ø):	8
Inspection hole:	Yes
Colour:	Blue
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

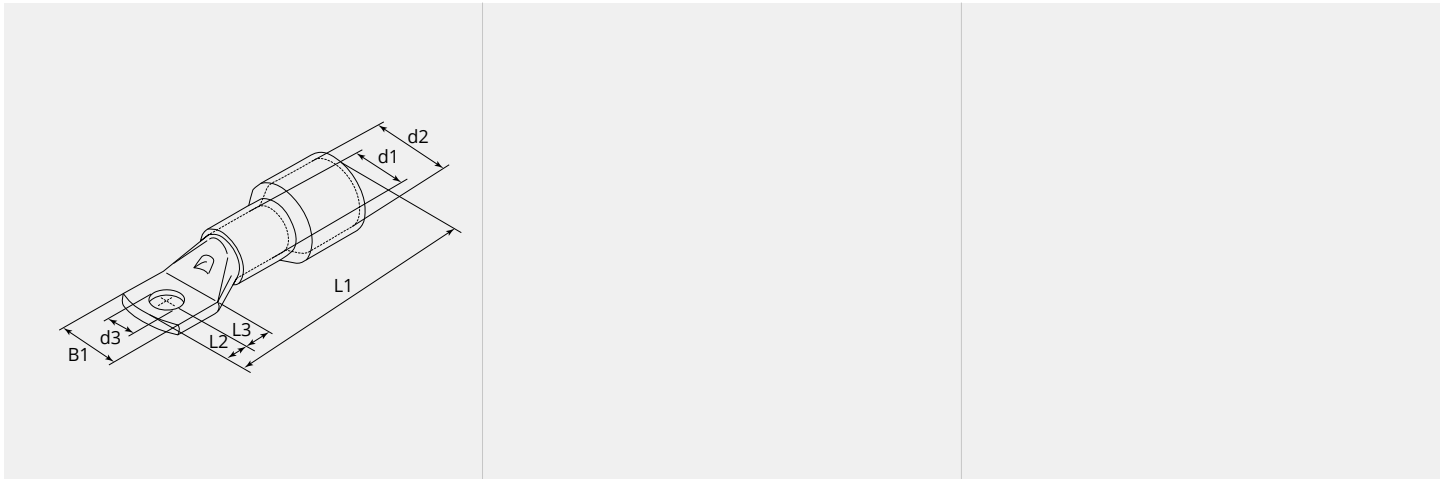

DIMENSIONS

L1 (mm):	73.0
L2 (mm):	8.0
L3 (mm):	9.0
B1 (mm):	25.0
d1 (Ø):	13.5
d2 (Ø):	18.0
d3 (Ø):	8.4

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)