

Nylon-insulated ring cable lug CU, 10mm²

Type AN-M, short-circuit proof for copper conductors


Item number: AN2-M5
Product weight (kg): 0.0046 kg
Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	10
Bolt (Ø):	5
Inspection hole:	Yes
Colour:	Red
Flammability rating UL 94:	UL94 - V2
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS

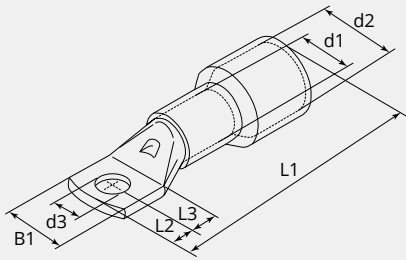

DIMENSIONS

L1 (mm):	37.6
L2 (mm):	6.0
L3 (mm):	6.5
B1 (mm):	10.0
d1 (Ø):	4.6
d2 (Ø):	8.0
d3 (Ø):	5.3

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)