

Nylon-insulated ring cable lug CU, 120mm²

Type AN-M, short-circuit proof for copper conductors

Item number: AN24-M8


Packing unit: 25



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	120
Wire section thin wires (mm ²):	95 - 120
Bolt (Ø):	8
Inspection hole:	Yes
Colour:	red
Colour:	\\CHZH-PMA1565\mS3_IMAM\be32893f-77e5-4e4d-82ef-810529cc027f\A0000012624f161313.ai
Flammability rating UL 94:	UL94 - V2
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS

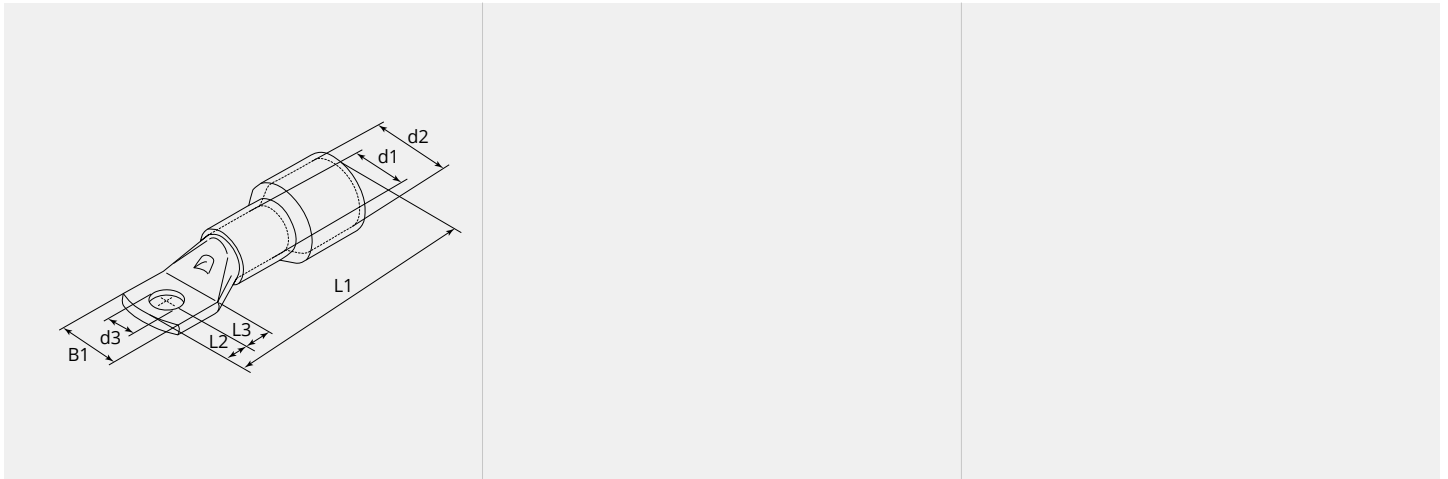

DIMENSIONS

L1 (mm):	73.7
L2 (mm):	8.0
L3 (mm):	9.0
B1 (mm):	28.5
d1 (Ø):	15.2
d2 (Ø):	20.0
d3 (Ø):	8.4

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)