


Nylon-insulated ring cable lug CU, 150mm²

Type AN-M, short-circuit proof for copper conductors


Item number: AN30-M10
Product weight (kg): 0.00 kg
Packing unit: 15



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	150
Wire section thin wires (mm ²):	120 - 150
Bolt (Ø):	10.00
Inspection hole:	Yes
Colour:	Red
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

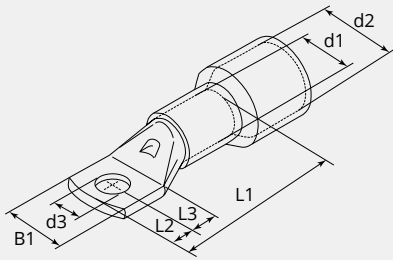

DIMENSIONS

L1 (mm):	69.0
L2 (mm):	11.0
L3 (mm):	130
B1 (mm):	31.5
d1 (Ø):	16.7
d2 (Ø):	23.0
d3 (Ø):	10.5

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)