

Nylon-insulated ring cable lug CU, 150mm²

Type AN-M, short-circuit proof for copper conductors

Item number: AN30-M12


Packing unit: 15



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	150
Wire section thin wires (mm ²):	120 - 150
Bolt (Ø):	12
Inspection hole:	Yes
Colour:	red
Colour:	\\CHZH-PMA1565\mS3_IMAM\be32893f-77e5-4e4d-82ef-810529cc027f\ao0000012624f161313.ai
Flammability rating UL 94:	UL94 - V2
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS

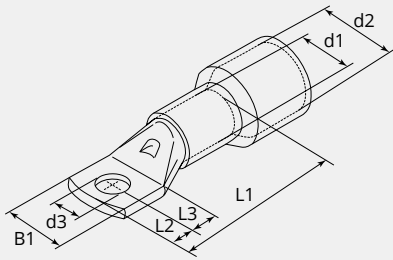

DIMENSIONS

L1 (mm):	75.0
L2 (mm):	14.0
L3 (mm):	16.0
B1 (mm):	31.5
d1 (Ø):	16.7
d2 (Ø):	23.0
d3 (Ø):	13.2

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)