


Nylon-insulated ring cable lug CU, 35mm²

Type AN-M, short-circuit proof for copper conductors

Item number: AN7-M5


Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	35
Wire section thin wires (mm ²):	25 - 35
Bolt (Ø):	5
Inspection hole:	Yes
Colour:	Red
Flammability rating UL 94:	UL94 - V2
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

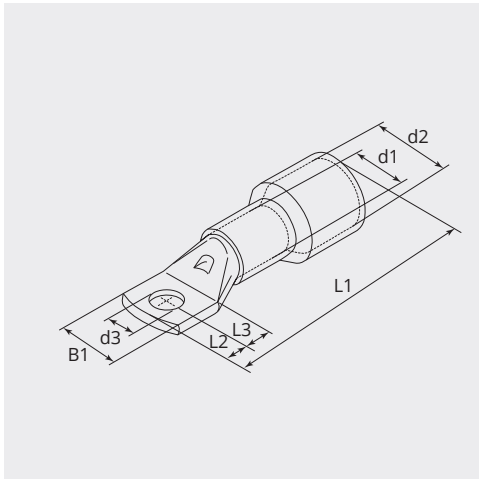

DIMENSIONS

L1 (mm):	47.5
L2 (mm):	6.0
L3 (mm):	6.5
B1 (mm):	17.0
d1 (Ø):	8.9
d2 (Ø):	11.9
d3 (Ø):	5.3

NOTE

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)