

# PA6.6 insulated copper tube crimping lug, 50mm<sup>2</sup>


Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Item number:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ANE12-M10 |
| Packing unit:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 25        |
|                                                                                                                                                                                                                                                                                                                                                                                                                         |           |
|       |           |

## TECHNICAL CHARACTERISTICS

|                                             |                         |
|---------------------------------------------|-------------------------|
| Material:                                   | ETP copper (CW008A)     |
| Surface:                                    | Electrolytically tinned |
| Wire section (mm <sup>2</sup> ):            | 50                      |
| Wire section thin wires (mm <sup>2</sup> ): | 35 - 50                 |
| Wire section (AWG/MCM):                     | 2 - 0                   |
| Bolt (Ø):                                   | 10                      |
| Inspection hole:                            | Yes                     |
| Colour:                                     | Black                   |
| Operating temperature (°C):                 | -20 - +115              |
| Max. temperature (°C):                      | +130                    |
| Manufacturer:                               | Cembre S.p.A.           |

## DIMENSIONS

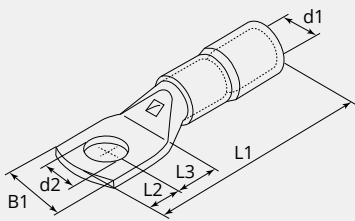

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 65.5 |
| L2 (mm): | 10.0 |
| L3 (mm): | 11.0 |
| B1 (mm): | 19.8 |
| d1 (Ø):  | 15.7 |
| d2 (Ø):  | 10.5 |

## Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)