

PA6.6 insulated copper tube crimping lug, 50mm²


Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number:	ANE12-M8
Product weight (kg):	0.0199 kg
Packing unit:	25
     	
	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	50
Wire section thin wires (mm ²):	35 - 50
Wire section (AWG/MCM):	2 - 0
Bolt (Ø):	8
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

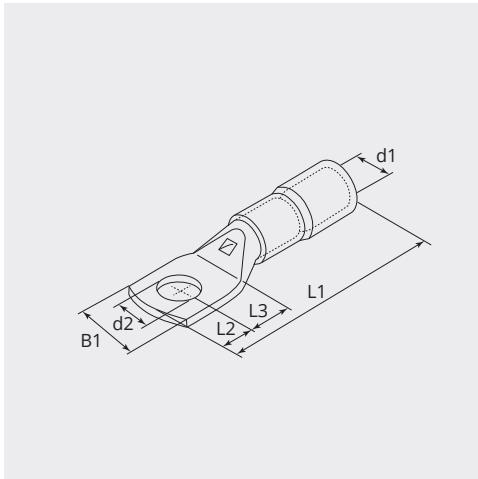

DIMENSIONS

L1 (mm):	61.5
L2 (mm):	8.0
L3 (mm):	9.0
B1 (mm):	19.8
d1 (Ø):	15.7
d2 (Ø):	8.4

NOTE

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)