

PA6.6 insulated copper tube crimping lug, 70mm²


Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number:	ANE17-M10-19
Packing unit:	25
	
	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	70
Wire section thin wires (mm ²):	50 - 70
Wire section (AWG/MCM):	0 - 00
Bolt (Ø):	10
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

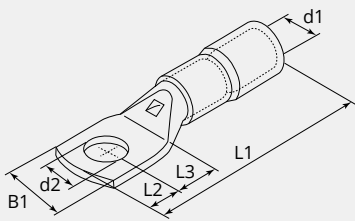

DIMENSIONS

L1 (mm):	69.8
L2 (mm):	10.0
L3 (mm):	11.0
B1 (mm):	19.0
d1 (Ø):	17.9
d2 (Ø):	10.5

Note

- Cable lug with contained palm
- Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)