

PA6.6 insulated copper tube crimping lug, 70mm²


Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number: ANE17-M8 Product weight (kg): 0.03 kg Packing unit: 25	
     	

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	70
Wire section thin wires (mm ²):	50 - 70
Wire section (AWG/MCM):	0 - 00
Bolt (Ø):	8.00
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

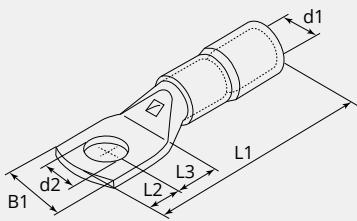

DIMENSIONS

L1 (mm):	65.8
L2 (mm):	8.0
L3 (mm):	9.0
B1 (mm):	23.0
d1 (Ø):	17.9
d2 (Ø):	8.4

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)