

PA6.6 insulated copper tube crimping lug, 95mm²

Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number: ANE20-M10

Product weight (kg): 0.00 kg


Packing unit: 25



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	95
Wire section thin wires (mm ²):	70 - 95
Wire section (AWG/MCM):	00 - 000
Bolt (Ø):	10.00
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

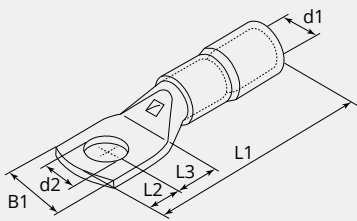

DIMENSIONS

L1 (mm):	74.6
L2 (mm):	10.0
L3 (mm):	11.0
B1 (mm):	27.0
d1 (Ø):	20.0
d2 (Ø):	10.5

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)