

PA6.6 insulated copper tube crimping lug, 120mm²

Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number: ANE29-M14


Packing unit: 25



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Eletrolytically tinned
Wire section (mm²):	120
Wire section thin wires (mm²):	95 - 120
Wire section (AWG/MCM):	000 - 250
Bolt (Ø):	14
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

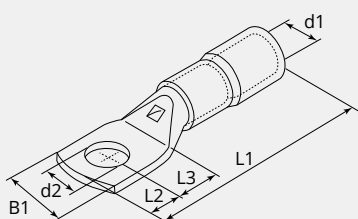

DIMENSIONS

L1 (mm):	88.5
L2 (mm):	12.0
L3 (mm):	15.5
B1 (mm):	30.0
d1 (Ø):	22.4
d2 (Ø):	15.0

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)