

PA6.6 insulated copper tube crimping lug, 150mm²

Type ANE-M, for copper conductors

Item number: ANE30-M20


Packing unit: 15



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm²):	150
Wire section thin wires (mm²):	120 - 150
Wire section (AWG/MCM):	250 - 300
Bolt (Ø):	20
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS

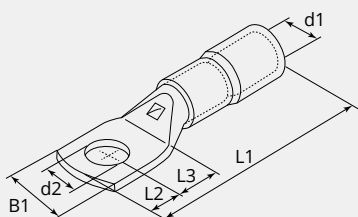

DIMENSIONS

L1 (mm):	113.0
L2 (mm):	20.0
L3 (mm):	22.0
B1 (mm):	31.5
d1 (Ø):	23.0
d2 (Ø):	21.0

Note

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)