

PA6.6 insulated copper tube crimping lug, 150mm²

Type ANE-M, for copper conductors acc. DIN EN60228 resp. VDE 0295 class 5 and 6

Item number: ANE35-M12


Packing unit: 15



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Elektrolytically tinned
Wire section (mm ²):	150
Wire section thin wires (mm ²):	120 - 150
Wire section (AWG/MCM):	250 - 300
Bolt (Ø):	12
Inspection hole:	Yes
Colour:	Black
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

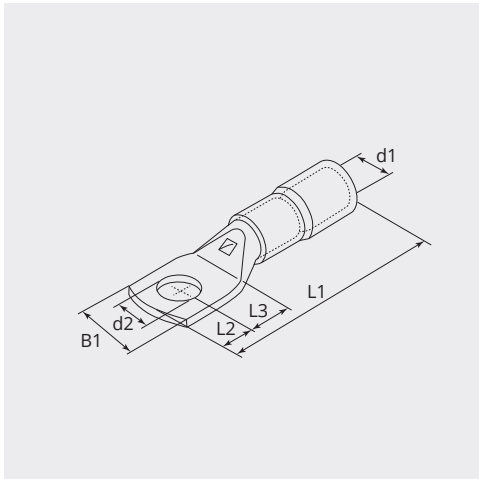

DIMENSIONS

L1 (mm):	95.0
L2 (mm):	14.0
L3 (mm):	16.0
B1 (mm):	34.2
d1 (Ø):	25.0
d2 (Ø):	13.2

NOTE

Each connector is marked as follows: Company logo and product description, material specification, conductor cross-section (mm²) and pin Ø (mm)