

Polyvinylchloride PVC insulated terminal CU, 1.5 - 2.5mm²

Type F, for copper conductors, ring terminal


Item number: BF-M3.5
Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Electrolytically tinned
Wire section (mm ²):	1.5 - 2.5
Wire section (AWG/MCM):	16 - 14
Bolt (Ø):	3.5
Colour:	Blue
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

DIMENSIONS

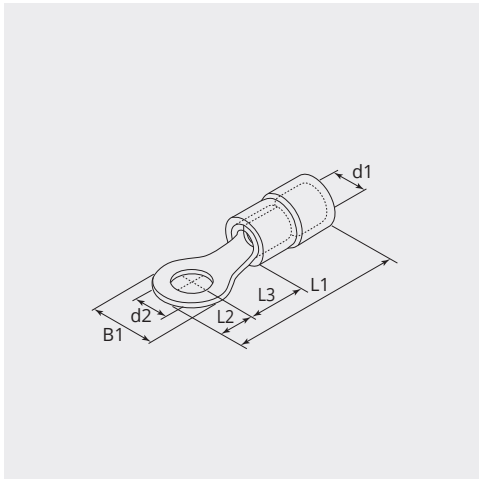

DIMENSIONS

L1 (mm):	17.9
L2 (mm):	2.8
L3 (mm):	5.0
B1 (mm):	5.6
d1 (Ø):	4.9
d2 (Ø):	3.7