

Polyamide PA6.6 insulated terminal CU, 1.5 - 2.5mm²

Type KY, for copper conductors, hooked blade terminal

Item number: BKY-PPL30


Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Electrolytically tinned
Wire section (mm ²):	1.5 - 2.5
Wire section (AWG/MCM):	16 - 14
Colour:	Blue
Operating temperature (°C):	-20 - +105
Max. temperature (°C):	+110
Manufacturer:	Cembre Group

DIMENSIONS

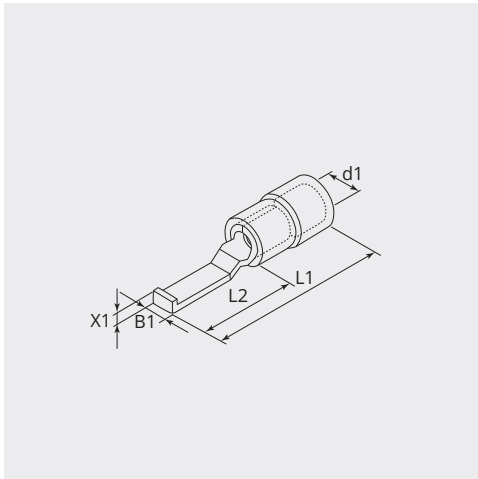

DIMENSIONS

X1 (mm):	2.1
L1 (mm):	28.2
L2 (mm):	16.8
B1 (mm):	3.0
d1 (Ø):	5.2