


Polycarbonate insulated terminals CU, 1.5 - 2.5mm²

Type CP, for copper conductors, female push-on terminal insulated, on reel (1750 pcs)

Item number: CBP-F608


Packing unit: 1

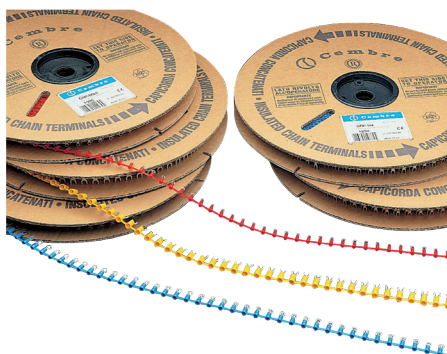

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Eletrolytically tinned
Wire section (mm²):	1.5 - 2.5
Wire section (AWG/MCM):	16 - 14
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Blue
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS



DIMENSIONS