


Polycarbonate insulated terminals CU, 1.5 - 2.5mm²

Type CP, for copper conductors, ring terminal, on reel (1750 pcs)

Item number: CBP-M3


Packing unit: 1

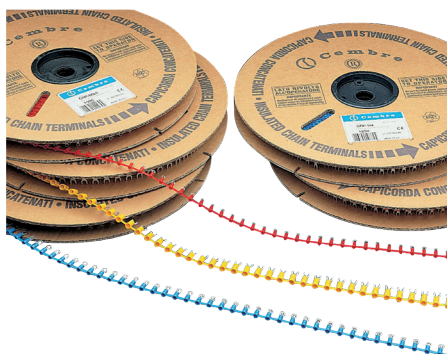

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm²):	1.5 - 2.5
Wire section (AWG/MCM):	16 - 14
Bolt (Ø):	3
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Blue
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS



DIMENSIONS

L1 (mm):	17.9
L2 (mm):	2.8
L3 (mm):	5.0
B1 (mm):	5.6
d1 (Ø):	4.9
d2 (Ø):	3.2