


Polycarbonate insulated terminals CU, 4 - 6mm²

Type CP, for copper conductors, ring terminal, on reel (1250 pcs)

Item number: CGP-M6-1


Packing unit: 1

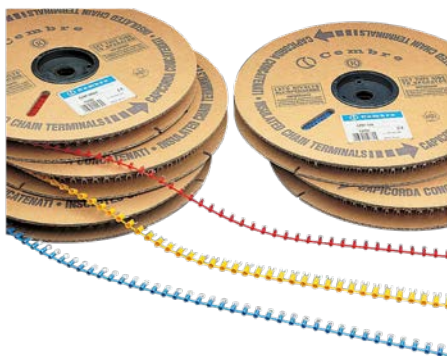

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm²):	4 - 6
Wire section (AWG/MCM):	12 - 10
Bolt (Ø):	6
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Yellow
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS



DIMENSIONS

L1 (mm):	27.7
L2 (mm):	5.5
L3 (mm):	8.1
B1 (mm):	11.0
d1 (Ø):	6.6
d2 (Ø):	6.4