


Polycarbonate insulated terminals CU, 4 - 6mm²

Type CP, for copper conductors, male push-on terminal, on reel (1250 pcs)

Item number: CGP-M608

Product weight (kg): 0.002 kg


Packing unit: 1

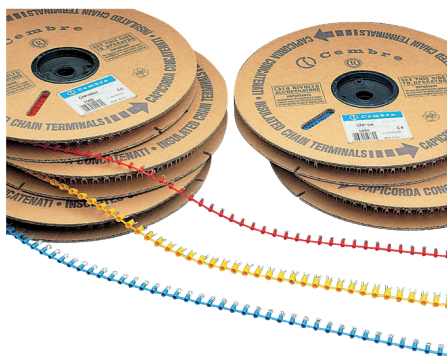

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Eletrolytically tinned
Wire section (mm2):	4 - 6
Wire section (AWG/MCM):	12 - 10
Ø Mounting:	27mm
Rolls:	450mm
Colour:	Yellow
Flammability rating UL 94:	UL94 - V0
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS



DIMENSIONS