
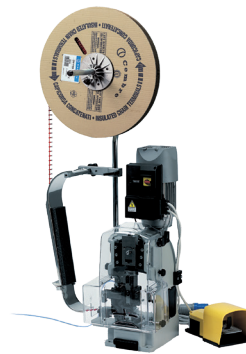


Polycarbonate insulated terminals CU, 4 - 6mm²

Type CP, for copper conductors, ring terminal, on reel (1250 pcs)

Item number:	CGP-M6
Product weight (kg):	0.0112 kg
Packing unit:	1

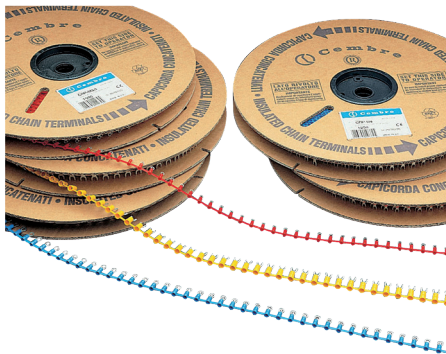


TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm ²):	4 - 6
Wire section (AWG/MCM):	12 - 10

TECHNICAL CHARACTERISTICS

Bolt (Ø):	6
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Yellow
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

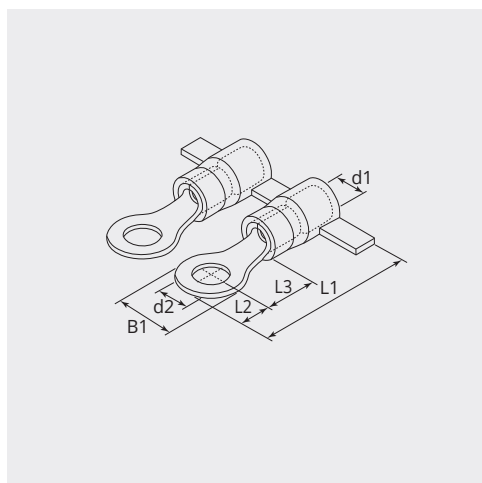

DIMENSIONS

L1 (mm):	30.7
L2 (mm):	5.5
L3 (mm):	11.1

DIMENSIONS

B1 (mm): 11.0

d1 (Ø): 6.6

d2 (Ø): 6.4