
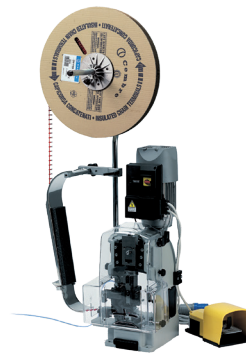


Polycarbonate insulated terminals CU, 4 - 6mm²

Type CP, for copper conductors, ring terminal, on reel (1250 pcs)

Item number: CGP-M8
 Product weight (kg): 3.3388 kg
 Packing unit: 1

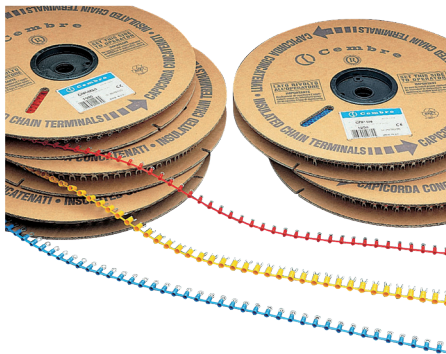


TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm ²):	4 - 6
Wire section (AWG/MCM):	12 - 10

TECHNICAL CHARACTERISTICS

Bolt (Ø):	8
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Yellow
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

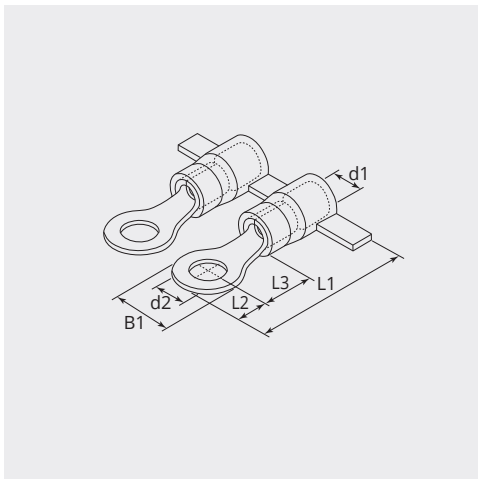

DIMENSIONS

L1 (mm):	33.0
L2 (mm):	6.8
L3 (mm):	12.1

DIMENSIONS

B1 (mm): 13.6

d1 (Ø): 6.6

d2 (Ø): 8.4