


Polycarbonate insulated terminals CU, 0.25 - 1.5mm²

Type CP, for copper conductors, ring terminal, on reel (2000 pcs)

Item number: CRP-M4

Product weight (kg): 0.0008 kg


Packing unit: 1

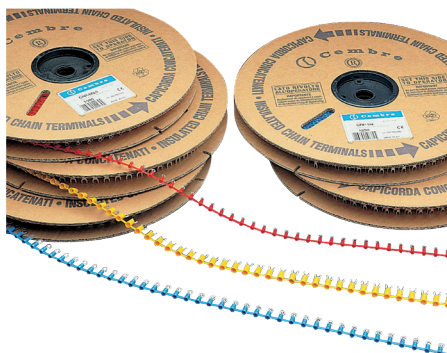

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm ²):	0.25 - 1.5
Wire section (AWG/MCM):	22 - 16
Bolt (Ø):	4
Ø Mounting:	27mm
Rolls:	450mm
Colour:	red
Colour:	\\CHZH-PMA1565\mS3_IMAM\be32893f-77e5-4e4d-82ef-810529cc027f\A0000012624f161313.ai
Flammability rating UL 94:	UL94 - V0
Operating temperature:	-20°C - +115°C
Max. temperature:	+130°C
Manufacturer:	Cembre S.p.A.

DIMENSIONS



DIMENSIONS

L1 (mm):	20.1
L2 (mm):	3.5
L3 (mm):	6.5
B1 (mm):	7.0
d1 (Ø):	4.0
d2 (Ø):	4.3