


Polycarbonate insulated terminals CU, 0.25 - 1.5mm²

Type CP, for copper conductors, ring terminal, on reel (2000 pcs)

Item number: CRP-M8

Product weight (kg): 0.0011 kg


Packing unit: 1

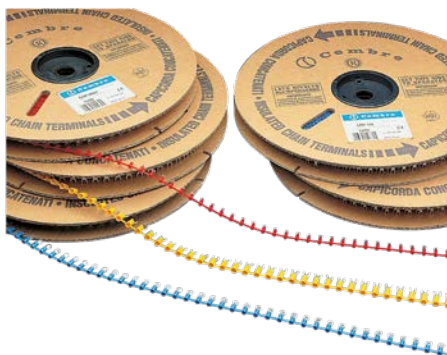

TECHNICAL CHARACTERISTICS

Material:	brass
Surface:	Elektrolytically tinned
Wire section (mm²):	0.25 - 1.5
Wire section (AWG/MCM):	22 - 16
Bolt (Ø):	8
Ø Mounting (mm):	27mm
Rolls (mm):	450mm
Colour:	Red
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre S.p.A.

DIMENSIONS



DIMENSIONS

L1 (mm):	26.4
L2 (mm):	6.0
L3 (mm):	10.3
B1 (mm):	12.0
d1 (Ø):	4.0
d2 (Ø):	8.4