
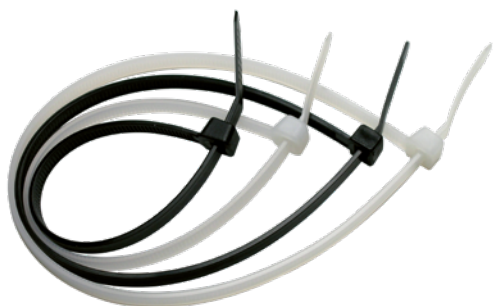
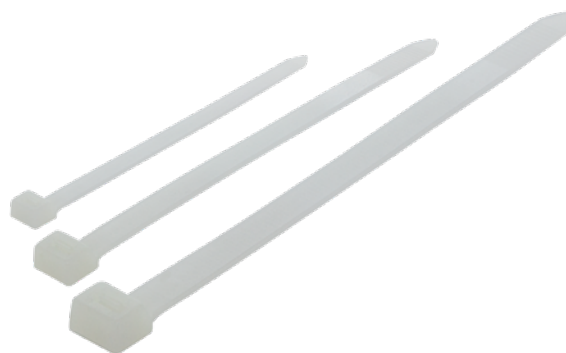


Cable tie polyamide PA6.6

Type CT, V2 UL94

Item number: CT250X4.8


Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Min. tensile strength (kg):	22.2
Max. cable insulation Ø (mm):	60
Operating temperature:	-40°C - +85°C
Colour:	Transparent
Colour:	\\CHZH-PMA1565\mS3_IMAM\be32893f-77e5-4e4d-82ef-810529cc027f\0000012611f161300.ai
Detachable:	No
Flammability rating UL 94:	UL94 - V2
Self-extinguishing:	Yes
UV-stabilised:	No
Halogen-free:	Yes
Manufacturer:	WKK GmbH

DIMENSIONS



DIMENSIONS

Length (mm):	250
A1 (mm):	4.8
Max. cable insulation Ø (mm):	60