

Polyvinylchloride PVC insulated terminal CU, 4 - 6mm²

Type F, for copper conductors, ring terminal


Item number:	GF-M4
Product weight (kg):	0.0018 kg
Packing unit:	100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	4 - 6
Wire section (AWG/MCM):	12 - 10
Bolt (Ø):	4
Colour:	Yellow
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

DIMENSIONS

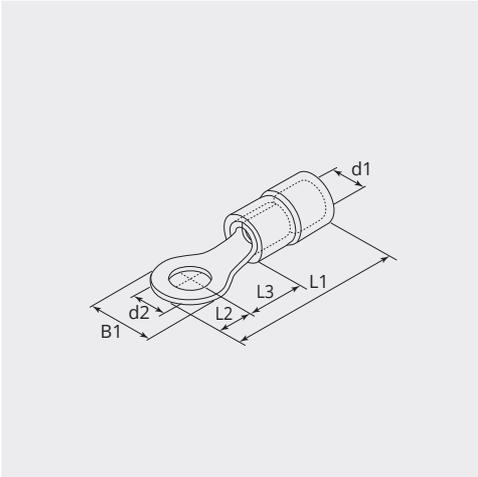

DIMENSIONS

L1 (mm):	26.8
L2 (mm):	4.5
L3 (mm):	8.1
B1 (mm):	9.0
d1 (Ø):	6.7
d2 (Ø):	4.3