

# Polyvinylchloride PVC insulated terminal CU, 4 - 6mm<sup>2</sup>

Type F, for copper conductors, ring terminal


Item number:	GF-M6
Product weight (kg):	0.0021 kg
Packing unit:	100



## TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm <sup>2</sup> ):	4 - 6
Wire section (AWG/MCM):	12 - 10
Bolt (Ø):	6
Colour:	Yellow
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

## DIMENSIONS

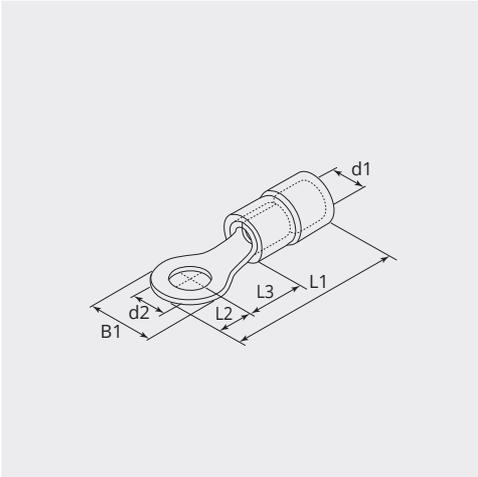

## DIMENSIONS

L1 (mm):	30.8
L2 (mm):	5.5
L3 (mm):	11.1
B1 (mm):	11.0
d1 (Ø):	6.7
d2 (Ø):	6.4