

Polyvinylchloride PVC insulated terminal CU, 4 - 6mm²

Type F, for copper conductors, pin terminal


Item number: GF-P10
 Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	4 - 6
Wire section (AWG/MCM):	12 - 10
Colour:	Yellow
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

DIMENSIONS

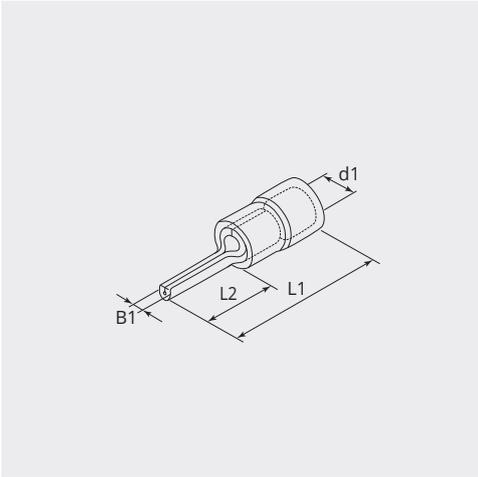

DIMENSIONS

L1 (mm):	24.6
L2 (mm):	10.0
B1 (mm):	2.2
d1 (Ø):	6.7