

Cable tie polyamide PA6.6, with labeling field

Type GFH, V2 UL94


Item number:	GFH100X2.5
Product weight (kg):	0.0006 kg
Packing unit:	100



TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Min. tensile strength (kg):	8.1
Max. cable insulation Ø (mm):	18
Operating temperature:	-40°C - +85°C
Max. temperature:	-40°C - +120°C
Colour:	Transparent
Detachable:	No
Flammability rating UL 94:	UL94 - V2
UV-stabilised:	No
Halogen-free:	Yes
Specifics:	2.5% (at 50% relative humidity)
Manufacturer:	WKK GmbH

DIMENSIONS

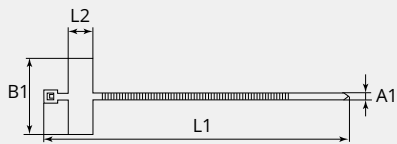

DIMENSIONS

Length (mm):	100
A1 (mm):	2.5
Max. cable insulation Ø (mm):	18

Note

- Resistant to: oils, greases, oil products, chlorinated solvents