

Polycarbonate insulated terminal CU, 4 - 6mm²

Type P, for copper conductors, ring terminal

Item number: GP-M10-1


Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Electrolytically tinned
Wire section (mm ²):	4 - 6
Wire section (AWG/MCM):	12 - 10
Bolt (Ø):	10
Colour:	Yellow
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

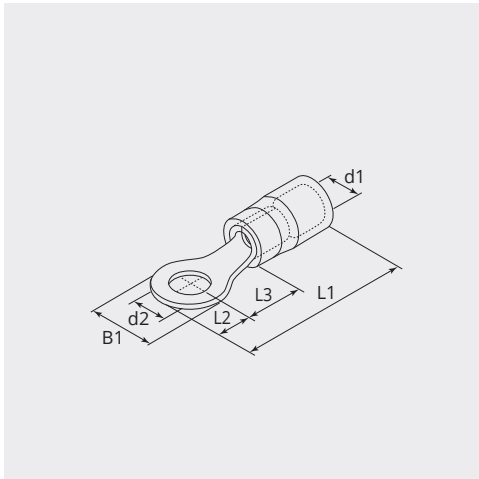

DIMENSIONS

L1 (mm):	35.7
L2 (mm):	7.7
L3 (mm):	13.8
B1 (mm):	15.5
d1 (Ø):	6.6
d2 (Ø):	10.5