


# Heat-shrinkable tube, 3:1

Type HST, polyolefin (PO-X), self-extinguishing

Item number: HST15GN

Packing unit: 1

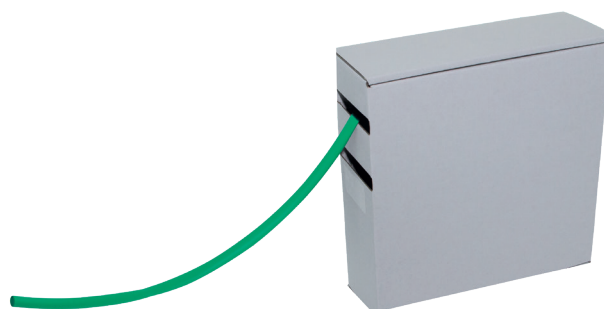

## TECHNICAL CHARACTERISTICS

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Shrink ratio:                        | 3:1                             |
| Length (m):                          | 10                              |
| Diameter (mm):                       | 1.5                             |
| Max. diameter (mm):                  | 0.5                             |
| Material:                            | Polyolefin, cross-linked (PO-X) |
| Starting diameter (mm):              | 1.5                             |
| Insulation resistance ( $\Omega$ m): | 600V - UL 224                   |
| Shrinking temperature (°C):          | +100                            |
| Operating temperature (°C):          | -55 - +125                      |
| Min. Temperature (°C):               | +70                             |

## TECHNICAL CHARACTERISTICS

|                                     |              |
|-------------------------------------|--------------|
| <b>Colour:</b>                      | Green        |
| <b>Fire protection class UL224:</b> | VW1 - UL 224 |
| <b>Packing:</b>                     | Dispenser    |
| <b>Manufacturer:</b>                | WKK GmbH     |