


Heat-shrinkable tube, 3:1

Type HST, polyolefin (PO-X), self-extinguishing

Item number: HST60BL-RL
Product weight (kg): 0.00 kg
Packing unit: 1

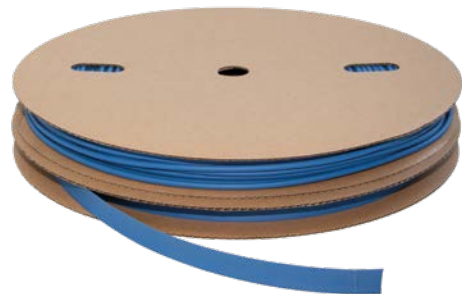

TECHNICAL CHARACTERISTICS

Shrink ratio:	3:1
Length (m):	75
Diameter (mm):	6.0
Max. diameter (mm):	2.0
Material:	Polyolefin, cross-linked (PO-X)
Starting diameter (mm):	6.00
Insulation resistance (Ω m):	600V - UL 224
Shrinking temperature (°C):	+100
Operating temperature (°C):	-55 - +125
Min. Temperature (°C):	+70

TECHNICAL CHARACTERISTICS

Colour:	Blue
Fire protection class UL224:	VW1 - UL 224
Packing:	On reels
Manufacturer:	WKK GmbH