


# Heat-shrinkable tube, 3:1

Type HST, polyolefin (PO-X), self-extinguishing

Item number: HST90BR

Packing unit: 1

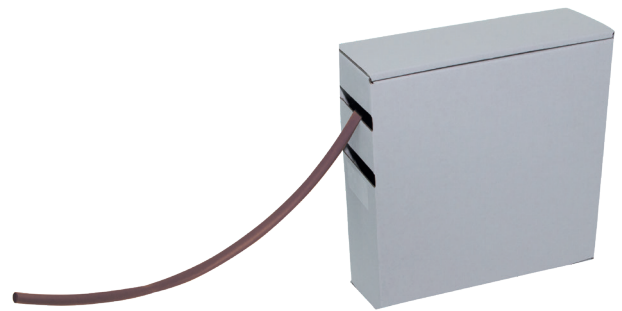

## TECHNICAL CHARACTERISTICS

|                              |                                 |
|------------------------------|---------------------------------|
| Shrink ratio:                | 3:1                             |
| Length (m):                  | 3                               |
| Diameter (mm):               | 9.0                             |
| Max. diameter (mm):          | 3.0                             |
| Material:                    | Polyolefin, cross-linked (PO-X) |
| Starting diameter (mm):      | 9                               |
| Insulation resistance (Ω m): | 600V - UL 224                   |
| Shrinking temperature (°C):  | +100                            |
| Operating temperature (°C):  | -55 - +125                      |
| Min. Temperature (°C):       | +70                             |

## TECHNICAL CHARACTERISTICS

|                                     |              |
|-------------------------------------|--------------|
| <b>Colour:</b>                      | Brown        |
| <b>Fire protection class UL224:</b> | VW1 - UL 224 |
| <b>Packing:</b>                     | Dispenser    |
| <b>Manufacturer:</b>                | WKK GmbH     |