

# Through connector CU, 240mm<sup>2</sup>

with central stop, Type L-M


|                      |           |
|----------------------|-----------|
| Item number:         | L48-M     |
| Product weight (kg): | 0.1537 kg |
| Packing unit:        | 10        |



## TECHNICAL CHARACTERISTICS

|                                             |                         |
|---------------------------------------------|-------------------------|
| Material:                                   | ETP copper (CW008A)     |
| Surface:                                    | Electrolytically tinned |
| Wire section (mm <sup>2</sup> ):            | 240                     |
| Wire section thin wires (mm <sup>2</sup> ): | 185 - 240               |
| Wire section (AWG/MCM):                     | 350 - 500               |
| Central stop:                               | Yes                     |
| Manufacturer:                               | Cembre Group            |

## DIMENSIONS

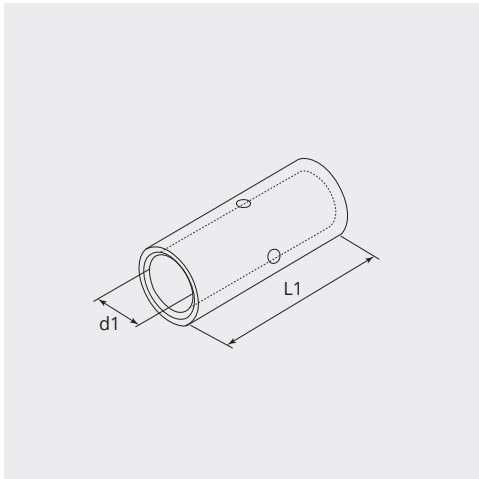

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 75.0 |
| d1 (Ø):  | 21.1 |

## NOTE

Product according DIN EN 61238-1; Test methods and requirements for compression and mechanical connectors for power cables for rated voltages up to 30 kV ( $U_m = 36$  kV)