

# Polycarbonate insulated copper tube crimping lug, 0.25 - 1.5mm<sup>2</sup>

Type P-M, for copper conductors, EN 45545-2

Item number: P03-M3


Packing unit: 100



## TECHNICAL CHARACTERISTICS

|                                       |                                 |
|---------------------------------------|---------------------------------|
| Material:                             | ETP copper (CW008A)             |
| Surface:                              | Electrolytically tinned         |
| Wire section (mm <sup>2</sup> ):      | 0.25 - 1.5                      |
| Bolt (Ø):                             | 3                               |
| Inspection hole:                      | Yes                             |
| Colour:                               | Red                             |
| Fire protection class DIN EN 45545-2: | R22:HL1/HL2<br>R23: HL1/HL2/HL3 |
| Flammability rating UL 94:            | UL94 - V0                       |
| Operating temperature (°C):           | -20 - +115                      |
| Max. temperature (°C):                | +130                            |
| Manufacturer:                         | Cembre Group                    |

## DIMENSIONS

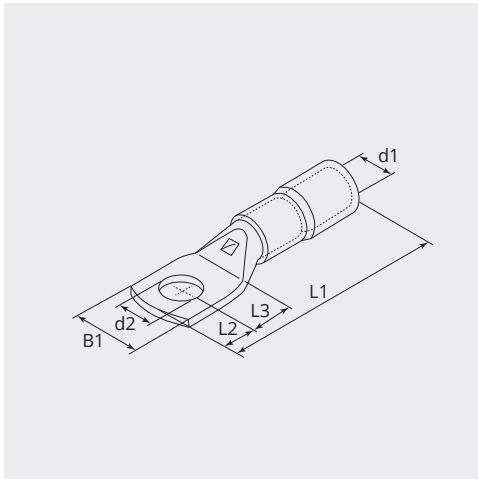

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 22.0 |
| L2 (mm): | 3.5  |
| L3 (mm): | 4.5  |
| B1 (mm): | 6.0  |
| d1 (Ø):  | 4.0  |
| d2 (Ø):  | 3.2  |

## NOTE

- Each connector is marked as follows: Company logo and cross-section (mm<sup>2</sup>)